




Product Data Sheet

Model : OPT-RY-5MB-3680-AI-WDR-30F

Professional 5 Megapixel AI Motorized Bullet Network Camera

5 Megapixel 5-50 mm Motorized High quality imaging with progressive scan
CMOS Real time Support SMART H.265/H.264 coding Up to 80M IR distance
Bullet network camera

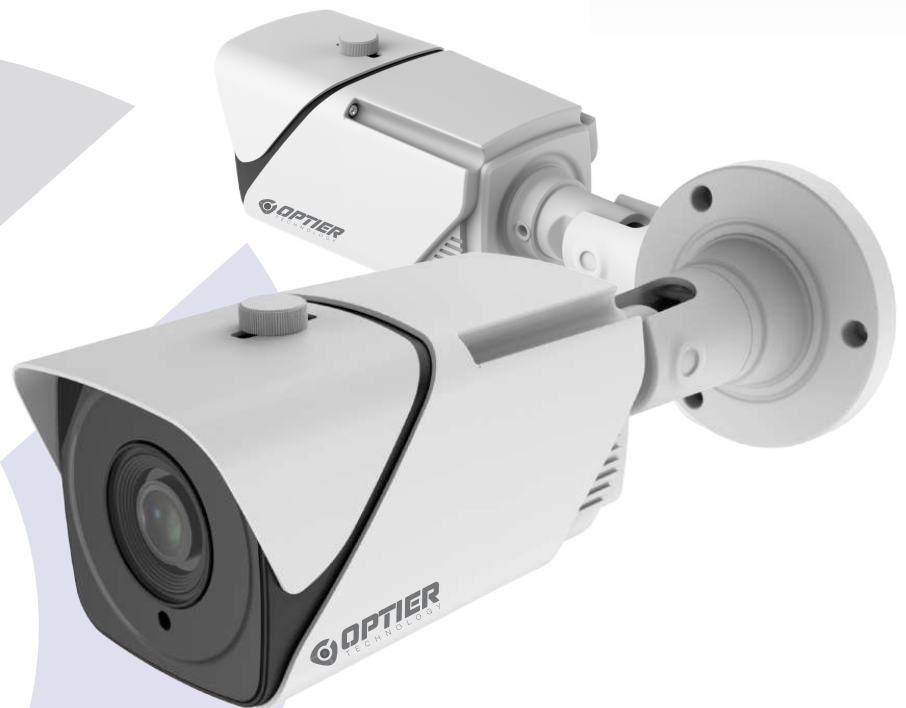

VIDEO

Imaging Device	1/2.7"
Effective Pixels	5MP 2592(H)×1944(V)
Scanning System	Progressive CMOS
Min. Illumination	Color 0.002lux @ F1.6(AGC ON) ; B/W 0 lux @ IR ON

LENS TYPE

Focal Length (Zoom Ratio)	5 ~ 50 mm
Max. Aperture Ratio	F No. 2.0±5%
Angular Field of View	Horizontal: 45-7°, Vertical:33-5 °, Diagonal: 58-9 °
Min. Object Distance	"0.2m~∞
Lens Type	Motorized(Ø14)



OPERATIONAL

IR Viewable Length	Up to 80m
Camera Title	On/Off
Day & Night	IR cut filter with auto switch (Day/Night/Auto/Image/Schedule)
Backlight Compensation	Off/On (5 Zone)
Wide Dynamic Range	WDR
Digital Noise Reduction	3D DNR
Motion Detection	Off/On (8 Level)
Privacy Masking	Off/On (4 Zone, Rectangle)
Gain Control	Auto
White Balance	Auto/Manual
Electronic Shutter Speed	1/5 ~ 1/20000s
On-Board Storage	Micro SD slot, up to 256GB
Alarm	1 input, 1 output
Audio	1 input (RCA), 1 output (RCA)
Hardware Reset	Yes
Smart Feature	Face Recognition, Pedestrian & Vehicle , Perimeter Intrusion , Line Crossing , Object Detection, Crossing Counting, Heat Map, Crowd Density , Queue Length , License Plate , Rare Sound, Intrusion, Region Entrance, Region Exiting




NETWORK

Ethernet	RJ45(10/100BASE-T)
Video Compression Format	H.265/H.264
Resolution	Main Stream 5MP(2592x1944),4MP(2592x1520),3MP(2304x1296)/(2048*1536) 1080P(1920x1080), 960P(1280*960) Sub Stream 1080P(1920x1080), 720P(1280x720),VGA(640x480) Mobile Stream VGA(640x480), QVGA (320x240) "
Max. Framerate	"50Hz: 25fps@5MP / 60Hz: 30fps@5MP"
Video Quality Adjustment	256Kbps ~ 8Mbps
Bitrate control method	CBR/VBR
Streaming Capability	Triple-Stream(Main/Sub/Moile)
Protocol	"TCP/IP,HTTP,DHCP,DNS,DDNS,RTP/RTSP, SMTP,NTP,UPnP,SNMP,HTTPS,FTP"
Web browser	"IE10/11, Safari V12.1 above, Firefox V.52 above, Google chrome V.57 above, Edge V.79 above"
Streaming Method	Unicast/Multicast
Application Programming Interface	ONVIF(Profile S/G/T/M)



Product Data Sheet

Model : OPT-RY-5MB-3680-AI-WDR-30F-MT

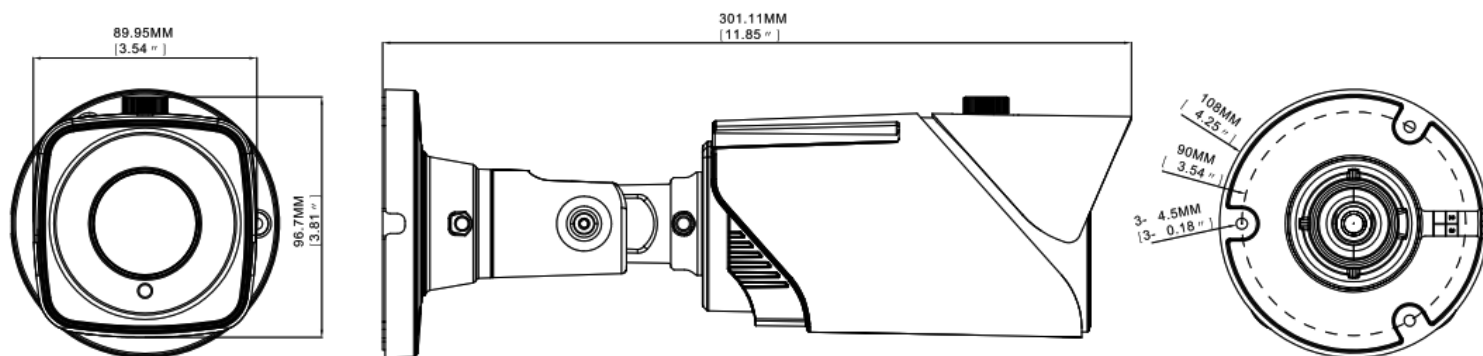

ENVIRONMENTAL

Operating Conditions

-35~+60°C/less than ≤ 90% RH

Ingress Protection

IP67

ELECTRICAL

Input Voltage / Current

D12V/POE(IEEE802.3af)

MECHANICAL

Material

Metal

